



EFL382X5

ELECTRIC COUNTERBALANCE FORKLIFT TRUCK 3.8T

3800 kg 6000 mm 80 V Li-Ion



The X5 Series is ideal for medium to heavy-duty operations, from manufacturing and construction to logistics centers and outdoor yards. Its pneumatic tires, 150 mm ground clearance, and sealed electrical components enable smooth, safe operation even on uneven or unpaved surfaces. The modular Li-ion battery system allows companies to expand energy capacity from 280Ah to 560Ah, adapting to single-shift, multi-shift, or seasonal high-demand applications without changing the truck setup.

SPECIFICATION	REF	UNIT	VALUE
Battery type			Li-Ion
Battery nominal capacity K5		Ah	280
Battery voltage		V	80
Rated capacity	Q	kg	3800
Load centre distance	c	mm	500
Service weight		kg	5350
Height, mast lowered	h_1	mm	2165
Lift	h_3	mm	3000
Height, mast extended	h_4	mm	4130
Overall length	l_1	mm	3865
Overall width	b_1/b_2	mm	1250
Length to face of forks	l_2	mm	2795
Fork dimensions	s/e/l	mm	50×122×1070
Turning radius	Wa	mm	2524
Manufacturer			EP
Model designation			EFL382X5

Features


Modular Li-ion battery system for maximum flexibility

The X5 Series introduces a modular battery architecture, allowing operators to install one or two battery modules depending on workload intensity. Each 80V/280Ah unit can be combined to achieve 560Ah total capacity, offering long runtime and seamless power management. This flexibility supports 24/7 operations and makes the X5 adaptable to evolving user needs over time



High performance for productivity boost

Delivering travel speeds up to 17 km/h, lifting speeds up to 0.55 m/s, and gradeability up to 25%, the X5 Series ensures fast, efficient handling comparable to traditional IC forklifts. Its lithium technology guarantees consistent performance and fast recovery through opportunity charging, enabling maximum uptime in fast-paced operations.



All-terrain capability with 150 mm ground clearance

With pneumatic tires and 150 mm ground clearance, the X5 Series effortlessly manages ramps, potholes, and rough surfaces. The robust undercarriage prevents chassis damage and ensures reliable mobility across mixed terrains, making it a dependable solution for both warehouse and outdoor logistics.



Operator comfort and improved components

The X5 prioritizes operator safety and comfort with a redesigned cabin, high-visibility mast, ergonomic seat with armrest, wide brake pedal, and large LED display. Enhanced LED front lighting and improved hydraulic controls offer excellent visibility and smooth, precise operation throughout the workday.




VDI Chart



	SPECIFICATION	REF	UNIT	VALUE
1.1	Manufacturer			EP
1.2	Model designation			EFL382X5
1.3	Drive			Electric
1.4	Operator type			Seated
1.5	Rated capacity	Q	kg	3800
1.6	Load centre distance	c	mm	500
1.8	Load distance, centre of drive axle to fork	x	mm	501
1.9	Wheelbase	y	mm	1760
2.1	Service weight		kg	5350
2.2	Axle loading, laden front/rear		kg	7910/1240
2.3	Axle loading, unladen front/rear		kg	1950/3400
3.1	Tyres			Solidrubber
3.2	Tyre size, front		mm	250-15
3.3	Tyre size, rear		mm	6.50-10
3.5	Wheels, number front/rear (x=drive wheels)			2x/2
3.6	Tread width, front	b ₁₀	mm	1010
3.7	Tread width, rear	b ₁₁	mm	980
4.1	Tilt of mast/fork carriage forward/backward		°	6/10
4.2	Height, mast lowered	h ₁	mm	2165
4.3	Free lift	h ₂	mm	90
4.4	Lift	h ₃	mm	3000
4.5	Height, mast extended	h ₄	mm	4130
4.7	Height of overhead guard (cabin)	h ₆	mm	2160
4.8	Seat height relating to SIP/stand height	h ₇	mm	1095
4.12	Coupling height	h ₁₀	mm	280
4.19	Overall length	l ₁	mm	3865
4.20	Length to face of forks	l ₂	mm	2795
4.21	Overall width	b ₁ /b ₂	mm	1250
4.22	Fork dimensions	s/e/l	mm	50×122×1070
4.23	Fork carriage ISO 2328, class/type A, B			3A
4.24	Fork carriage width		mm	1100
4.31	Ground clearance, laden, below mast		mm	120

SPECIFICATION		REF	UNIT	VALUE
4.32	Ground clearance, centre of wheelbase	m ₂	mm	150
4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	4225
4.34.2	Aisle width for pallets 800 × 1200 lengthways	Ast	mm	4425
4.35	Turning radius	Wa	mm	2524
5.1	Travel speed, laden/unladen		km/h	15/16
5.2	Lift speed, laden/unladen		m/s	0.43/0.52
5.3	Lowering speed, laden/unladen		m/s	0.5/0.4
5.8	Max. gradeability, laden/unladen		%	16/20
5.10	Service brake			Hydraulic
5.11	Parking brake			Mechanical
6.1	Drive motor rating S2 60 min		kW	16
6.2	Lift motor rating at S3 15%		kW	30
6.4	Battery nominal capacity K5		Ah	280
6.4	Battery voltage		V	80
6.4.1	Battery type			Li-Ion
6.5	Battery weight		kg	185
6.6	Energy consumption according to DIN EN 16796		kWh/h	10.48
6.7	Turnover output according to VDI 2198			262.2
6.8	Turnover efficiency according to VDI 2198			25.93
8.1	Type of drive unit			AC
10.1	Operating pressure for attachments		bar	180
10.2	Oil volume for attachments		ℓ/min	35
10.5	Steering design			Hydraulic
10.7	Sound pressure level at the driver's seat		dB(A)	<74

EFL382X5

RATED CAPACITIES AND LOAD CENTERES GRAPH

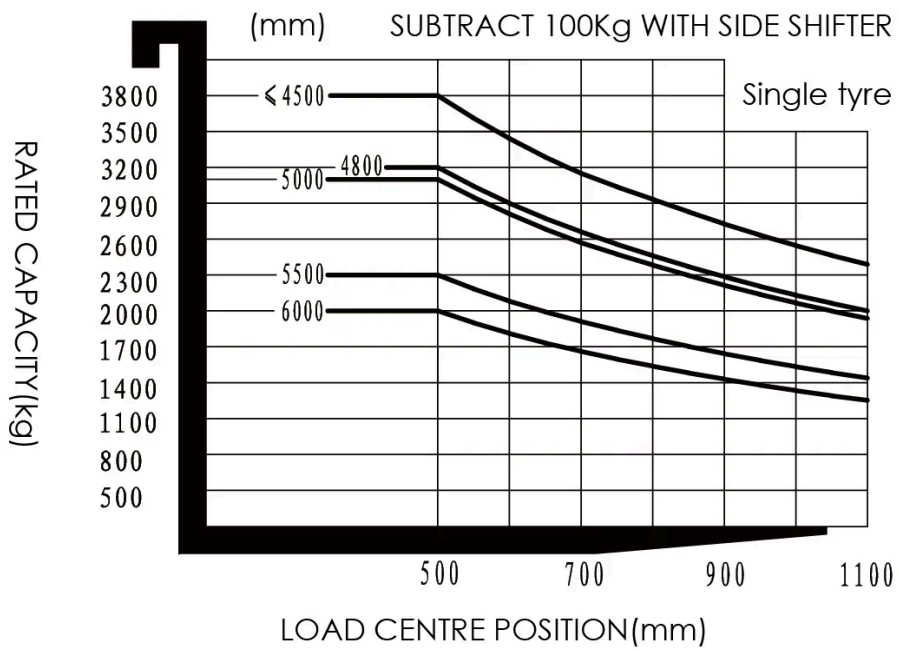

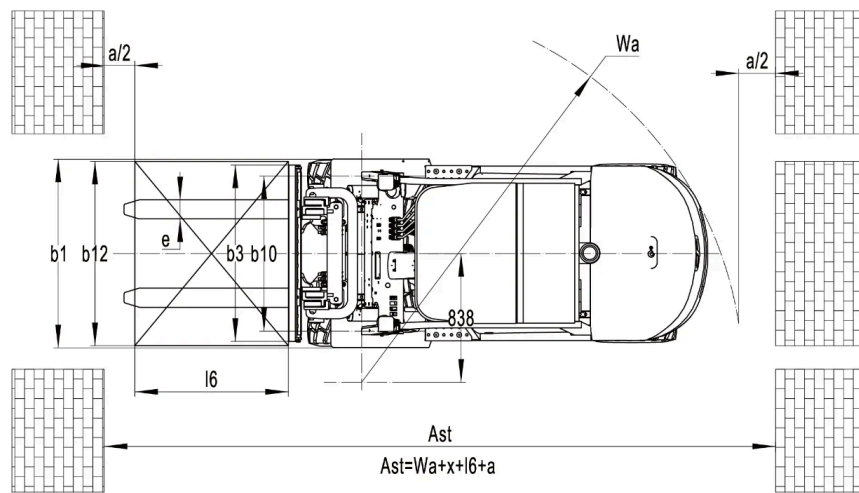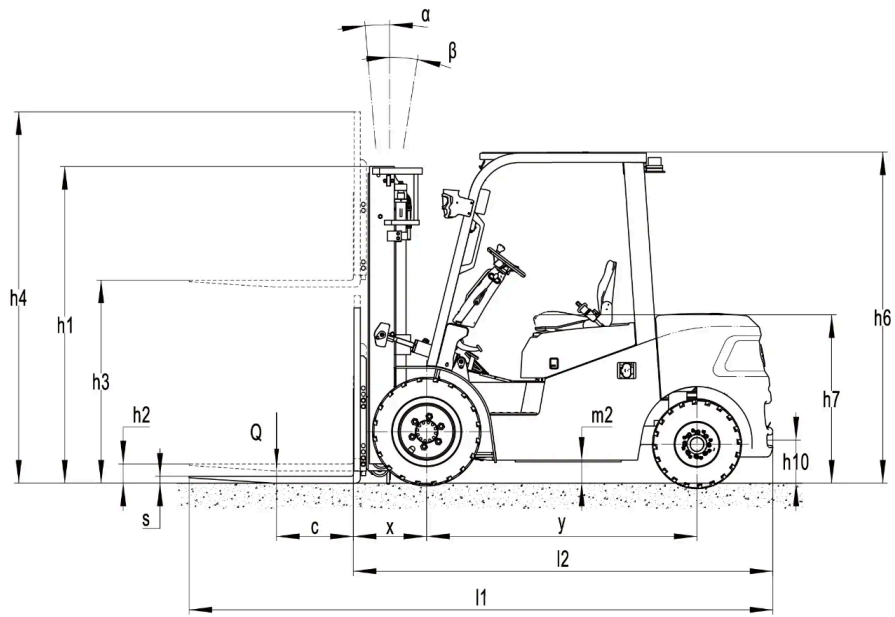

Mast Options

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
2-Standard Mast	3000	2165	3665	4130	90	90
2-Standard Mast	3300	2315	3965	4430	90	90

MAST TYPE	LIFT HEIGHT (H3, MM)	MAST LOWERED HEIGHT (H1, MM)	MAST EXTENDED HEIGHT, NO BACKREST (H4, MM)	MAST EXTENDED HEIGHT, WITH BACKREST (H4, MM)	FREE LIFT HEIGHT, NO BACKREST (H2, MM)	FREE LIFT HEIGHT, WITH BACKREST (H2, MM)
2-Standard Mast	3500	2415	4165	4630	90	90
2-Standard Mast	3600	2465	4265	4730	90	90
2-Standard Mast	4000	2715	4665	5130	90	90
2-Standard Mast	4500	2965	5165	5630	90	90
2-Free Mast	3000	2045	3715	4175	1410	950
2-Free Mast	3300	2195	4015	4475	1560	1100
2-Free Mast	3600	2345	4315	4775	1710	1250
3-Free Mast	4300	2080	5030	5435	1390	985
3-Free Mast	4500	2160	5220	5625	1470	1065
3-Free Mast	4800	2265	5520	5925	1575	1170
3-Free Mast	5000	2350	5720	6125	1660	1255
3-Free Mast	5500	2600	6220	6625	1910	1505
3-Free Mast	6000	2850	6720	7125	2160	1755

Options

ITEM	OPTIONS (optional items marked in yellow)
Fork dimension	122*50*1070 122*50*1150 122*50*1220 122*50*1370 122*50*1520 122*50*1600 122*50*1700 122*50*2000 122*50*2420 122*50*2200 122*50*1820
Front wheel material	Normal solid Traceless solid
Rear wheel material	Normal solid Traceless solid
Battery capacity	80V280AH 80V560AH
Charger	80V35A integrated 80V60A integrated 80V60A○80V100A 80V150A 80V200A (560AH)
Battery display indicator (BDI)	With time Bluetooth without PSE
Seat type	Comfortable + safety belt switch Seat with armrest with safety belt switch Suspension + safety belt switch
Attachments	Built-in sideshifter External shifter Fork positioner with sideshift Clamp
Traction pin	Yes and not customized

ITEM	OPTIONS (optional items marked in yellow)
Anti-static chain	Yes and not customized
Front lamp	LED
Rear lamp	No LED
Warning lamp	Yes and not customized
Steering lamp	LED
Blue lamp	No Rear Front and rear
Area warning lamp	No Both side Both side and rear
Rearview mirror	One in front Two on sides Two on side and one in front
Buzzer	Yes and not customized
OPS system	Yes and not customized
USB interface	USB with A and C type
Telematics	Yes and not customized No
Cabin	No Basic half cabin Upgrade half cabin Full cabin
Overhead guard	With tempered glass No
Turn speed control	No
Heating system during lithium battery charging	No Yes and not customized
Operator identification device	No Card reader
Lifting electronic limit	No Yes and not customized
Hydraulic control	Mechanical lever Joystick Fingertip
Rear armrest horn	Yes and not customized
Wiper water unit	Yes only with cabin